

Time Series Database Interface: R fame (TSfame)

November 2, 2008

1 Introduction

The code from the vignette that generates this guide can be loaded into an editor with `edit(vignette("TSfame"))`. This uses the default editor, which can be changed using `options()`. It should be possible to view the pdf version of the guide for this package with `print(vignette("TSfame"))`.

WARNING: running these example will overwrite the fame "testvigFame.db" database.

Once R is started, the functions in this package are made available with

```
> library("TSfame")
```

This will also load required packages *TSdbi*, *DBI*, *fame*, *methods*, and *tframe*. Some examples below also require *zoo*, and *tseries*.

2 Using the Database - TSdbi Functions

This section gives several simple examples of putting series on and reading them from the database. (If a large number of series are to be loaded into a database, one would typically do this with a batch process in Fame.) The first thing to do is to establish a connection to the database:

```
> con <- TSconnect("fame", dbname = "testvigFame.db")
```

This puts a series called *vec* on the database and then reads it back.

```
> z <- ts(rnorm(10), start = c(1990, 1), frequency = 1)
> seriesNames(z) <- "vec"
> if (TSexists("vec", con)) TSdelete("vec", con)
> TSput(z, con)
> z <- TSget("vec", con)
```

If the series is printed it is seen to be a "ts" time series with some extra attributes.

TSput fails if the series already exists on the *con*, so the above example checks and deletes the series if it already exists. *TSreplace* does not fail if the

series does not yet exist, so examples below use it instead. Several plots below show original data and the data retrieved after it is written to the database. One is added to the original data so that both lines are visible.

And now more examples:

```
> z <- ts(matrix(rnorm(20), 10, 2), start = c(1990, 1), frequency = 1)
> seriesNames(z) <- c("matc1", "matc2")
> TSreplace(z, con)

[1] TRUE

> TSget("matc1", con)

Time Series:
Start = 1990
End = 1999
Frequency = 1
[1] -0.55375022  0.01472166  0.42340265  0.21009793 -0.05534527 -0.92950567
[7]  0.77679963 -1.39816774  0.65727315 -1.44489052
attr(,"seriesNames")
[1] matc1
attr(,"TSmeta")
An object of class "TSmeta"
Slot "TSdescription":
[1] NA

Slot "TSdoc":
[1] NA

Slot "TSlabell":
[1] NA

Slot "serIDs":
[1] "matc1"

Slot "conType":
[1] "TSfameConnection"
attr(,"package")
[1] "TSfame"

Slot "DateStamp":
[1] "2008-11-02 21:20:02 EST"

Slot "dbname":
[1] "testvigFame.db"

Slot "hasVintages":
```

```

[1] FALSE

Slot "hasPanels":
[1] FALSE

> TSget("matc2", con)

Time Series:
Start = 1990
End = 1999
Frequency = 1
[1] 0.10446671 -0.27068151 0.04125567 -0.59247163 1.90368307 -0.72497654
[7] 0.28430702 -0.76771886 0.65206873 0.51853762
attr(,"seriesNames")
[1] matc2
attr(,"TSmeta")
An object of class "TSmeta"
Slot "TSdescription":
[1] NA

Slot "TSdoc":
[1] NA

Slot "TSlabel":
[1] NA

Slot "serIDs":
[1] "matc2"

Slot "conType":
[1] "TSfameConnection"
attr(,"package")
[1] "TSfame"

Slot "DateStamp":
[1] "2008-11-02 21:20:02 EST"

Slot "dbname":
[1] "testvigFame.db"

Slot "hasVintages":
[1] FALSE

Slot "hasPanels":
[1] FALSE

> TSget(c("matc1", "matc2"), con)

```

```

Time Series:
Start = 1990
End = 1999
Frequency = 1
      matc1      matc2
1990 -0.55375022  0.10446671
1991  0.01472166 -0.27068151
1992  0.42340265  0.04125567
1993  0.21009793 -0.59247163
1994 -0.05534527  1.90368307
1995 -0.92950567 -0.72497654
1996  0.77679963  0.28430702
1997 -1.39816774 -0.76771886
1998  0.65727315  0.65206873
1999 -1.44489052  0.51853762
attr(,"seriesNames")
[1] matc1 matc2
attr(,"TSmeta")
An object of class "TSmeta"
Slot "TSdescription":
[1] NA

Slot "TSdoc":
[1] NA

Slot "TSlabel":
[1] NA

Slot "serIDs":
[1] "matc1" "matc2"

Slot "conType":
[1] "TSfameConnection"
attr(,"package")
[1] "TSfame"

Slot "DateStamp":
[1] "2008-11-02 21:20:02 EST"

Slot "dbname":
[1] "testvigFame.db"



Slot "hasVintages":
[1] FALSE

Slot "hasPanels":

```

```
[1] FALSE

> tfplot(z + 1, TSget(c("matc1", "matc2"), con), lty = c("solid",
  "dashed"), col = c("black", "red"))
```

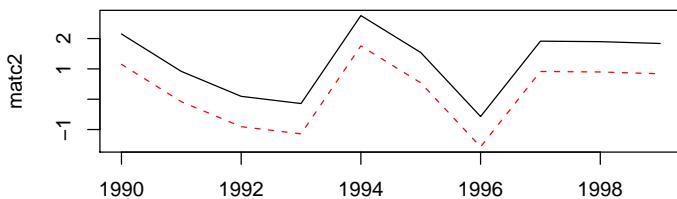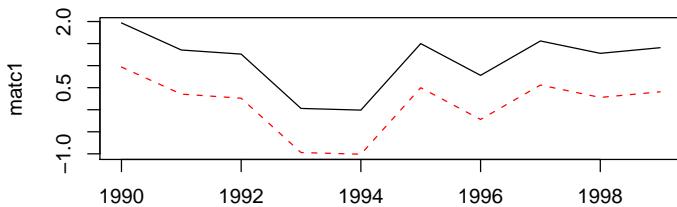

```
> z <- ts(matrix(rnorm(20), 10, 2), start = c(1990, 1), frequency = 4)
> seriesNames(z) <- c("matc1", "matc2")
> TSreplace(z, con)
```

```
[1] TRUE

> TSget(c("matc1", "matc2"), con)
```

		matc1	matc2
1990	Q1	0.029200372	1.4230080
1990	Q2	1.187166613	0.7595729
1990	Q3	-1.724411011	-0.3887600
1990	Q4	0.007450925	-1.1145739
1991	Q1	-0.967664116	-1.2241946
1991	Q2	-0.740434962	1.1886898
1991	Q3	-0.179002447	0.7621241
1991	Q4	-1.857955225	-1.4584179
1992	Q1	1.722374613	1.2907494

```

1992 Q2 -2.081563613 2.2344626
attr(,"seriesNames")
[1] matc1 matc2
attr(,"TSmeta")
An object of class "ITSmeta"
Slot "TSdescription":
[1] NA

Slot "TSdoc":
[1] NA

Slot "TSlabell":
[1] NA

Slot "serIDs":
[1] "matc1" "matc2"

Slot "conType":
[1] "TSfameConnection"
attr(,"package")
[1] "TSfame"

Slot "DateStamp":
[1] "2008-11-02 21:20:04 EST"


Slot "dbname":
[1] "testvigFame.db"

Slot "hasVintages":
[1] FALSE

Slot "hasPanels":
[1] FALSE

> tfplot(z + 1, TSget(c("matc1", "matc2"), con), lty = c("solid",
  "dashed"), col = c("black", "red"))

```

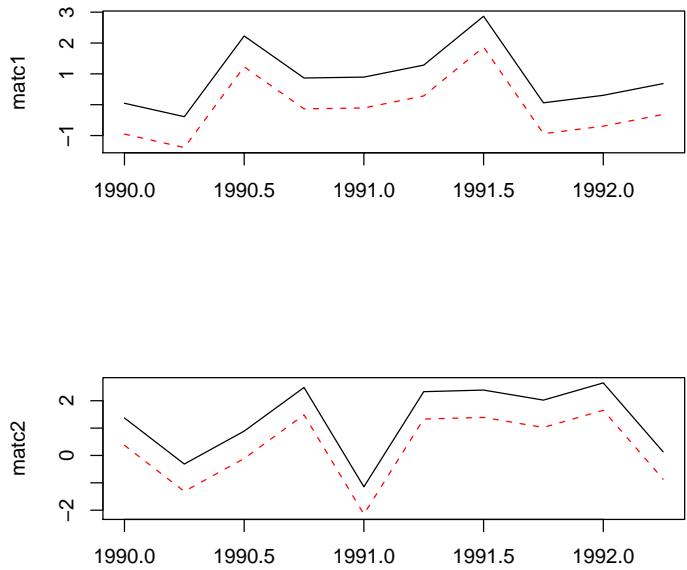


```

> z <- ts(matrix(rnorm(200), 100, 2), start = c(1995, 1), frequency = 12)
> seriesNames(z) <- c("mat2c1", "mat2c2")
> TSreplace(z, con)

[1] TRUE

> tfplot(z + 1, TSget(c("mat2c1", "mat2c2"), con), lty = c("solid",
  "dashed"), col = c("black", "red"))

```

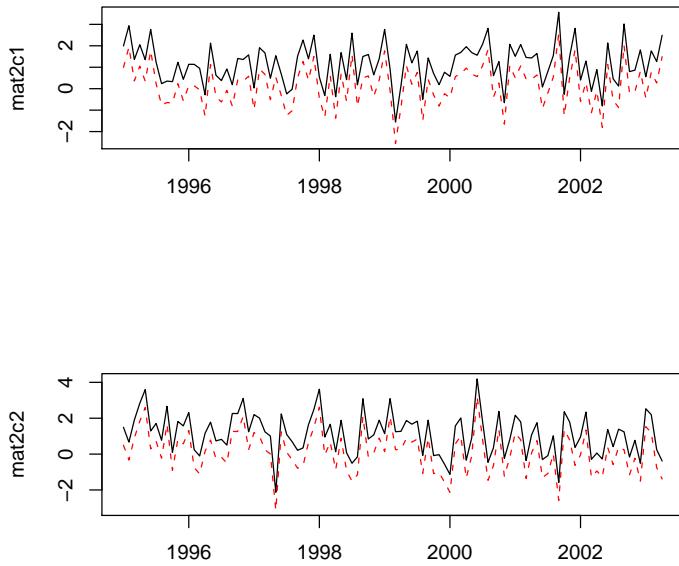

The following extract information about the series from the database, although not much information has been added for these examples.

```
> TSmeta("mat2c1", con)
> TSmeta("vec", con)
> TSdates("vec", con)
> TSdescription("vec", con)
> TSdoc("vec", con)
```

Below are examples that make more use of *TSdescription* and code *TSdoc*. Often it is convenient to set the default connection:

```
> options(TSconnection = con)
```

and then the *con* specification can be omitted from the function calls unless another connection is needed. The *con* can still be specified, and some examples below do specify it, just to illustrate the alternative syntax.

```
> z <- TSget("mat2c1")
> TSmeta("mat2c1")
```

```
An object of class "TSmeta"
Slot "TSdescription":
[1] "NA"
```

```

Slot "TSdoc":
[1] "NA"

Slot "TSlabel":
[1] NA

Slot "serIDs":
[1] "mat2c1"

Slot "conType":
[1] "TSfameConnection"
attr(,"package")
[1] "TSfame"

Slot "DateStamp":
[1] NA

Slot "dbname":
[1] "testvigFame.db"

Slot "hasVintages":
[1] FALSE

Slot "hasPanels":
[1] FALSE

```

Data documentation can be in two forms, a description specified by *TSdescription* or longer documentation specified by *TSdoc*. These can be added to the time series object, in which case they will be written to the database when *TSput* or *TSreplace* is used to put the series on the database. Alternatively, they can be specified as arguments to *TSput* or *TSreplace*. The description or documentation will be retrieved as part of the series object with *TSget* only if this is specified with the logical arguments *TSdescription* and *TSdoc*. They can also be retrieved directly from the database with the functions *TSdescription* and *TSdoc*.

```

> z <- ts(matrix(rnorm(10), 10, 1), start = c(1990, 1), frequency = 1)
> TSreplace(z, serIDs = "Series1", con)
[1] TRUE

> zz <- TSget("Series1", con)
> TSreplace(z, serIDs = "Series1", con, TSdescription = "short rnorm series",
   TSdoc = "Series created as an example in the vignette.")

[1] TRUE

```

```

> zz <- TSget("Series1", con, TSdescription = TRUE, TSdoc = TRUE)
> start(zz)

[1] 1990     1

> end(zz)

[1] 1999     1

> TSdescription(zz)

[1] "short rnorm series  from  testvigFame.db retrieved  2008-11-02 21:20:06"

> TSdoc(zz)

[1] "Series created as an example in the vignette."

> TSdescription("Series1", con)

[1] "short rnorm series"

> TSdoc("Series1", con)

[1] "Series created as an example in the vignette."

> z <- ts(rnorm(10), start = c(1990, 1), frequency = 1)
> seriesNames(z) <- "vec"
> TSreplace(z, con)


[1] TRUE

> zz <- TSget("vec", con)
> z <- ts(matrix(rnorm(20), 10, 2), start = c(1990, 1), frequency = 1)
> seriesNames(z) <- c("matc1", "matc2")
> TSreplace(z, con)

[1] TRUE

> tfplot(z + 1, TSget(c("matc1", "matc2"), con), lty = c("solid",
  "dashed"), col = c("black", "red"))

```

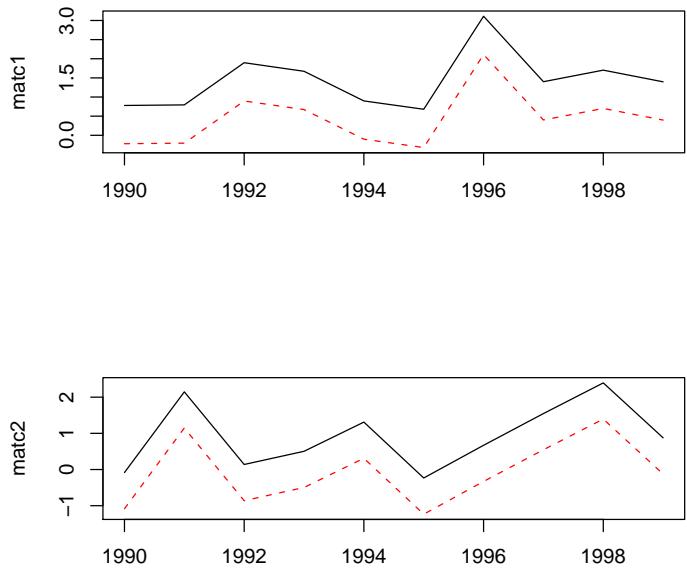


```

> z <- ts(matrix(rnorm(20), 10, 2), start = c(1990, 1), frequency = 4)
> seriesNames(z) <- c("matc1", "matc2")
> TSreplace(z, con)

[1] TRUE

> tfplot(z + 1, TSget(c("matc1", "matc2"), con), lty = c("solid",
  "dashed"), col = c("black", "red"))

```

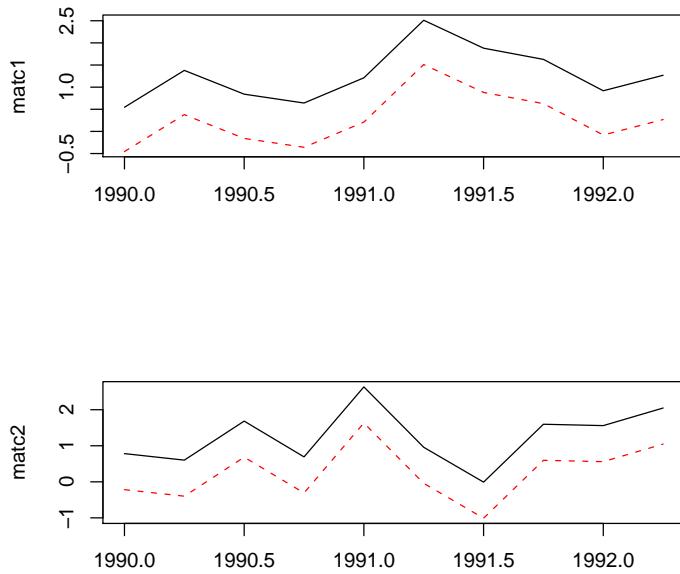


```

> z <- ts(matrix(rnorm(200), 100, 2), start = c(1995, 1), frequency = 12)
> seriesNames(z) <- c("mat2c1", "mat2c2")
> TSreplace(z, con)

[1] TRUE

> tfplot(z + 1, TSget(c("mat2c1", "mat2c2"), con), lty = c("solid",
  "dashed"), col = c("black", "red"))

```

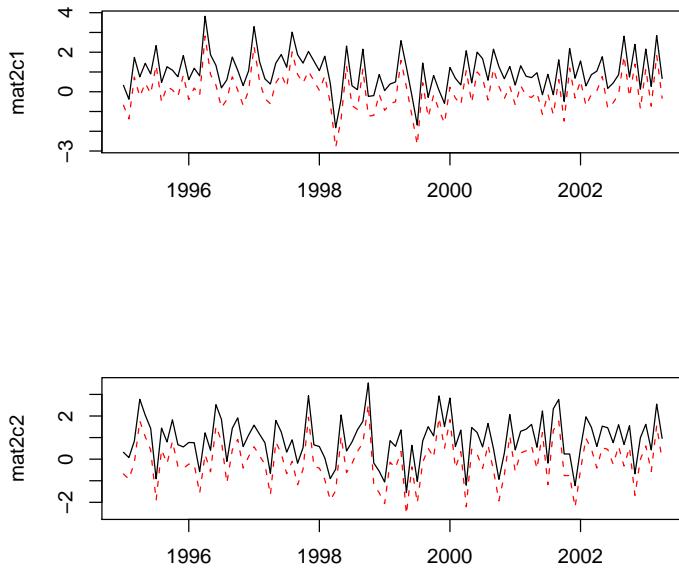


The following examples use dates and times which are not handled by *ts*, so the *zoo* time representation is used.

```
> require("zoo")
> z <- zoo(matrix(rnorm(200), 100, 2), as.Date("1990-01-01") +
  0:99)
> seriesNames(z) <- c("zooc1", "zooc2")
> TSreplace(z, con, Table = "D")

[1] TRUE

> tfplot(z + 1, TSget(c("zooc1", "zooc2"), con), lty = c("solid",
  "dashed"), col = c("black", "red"))
```

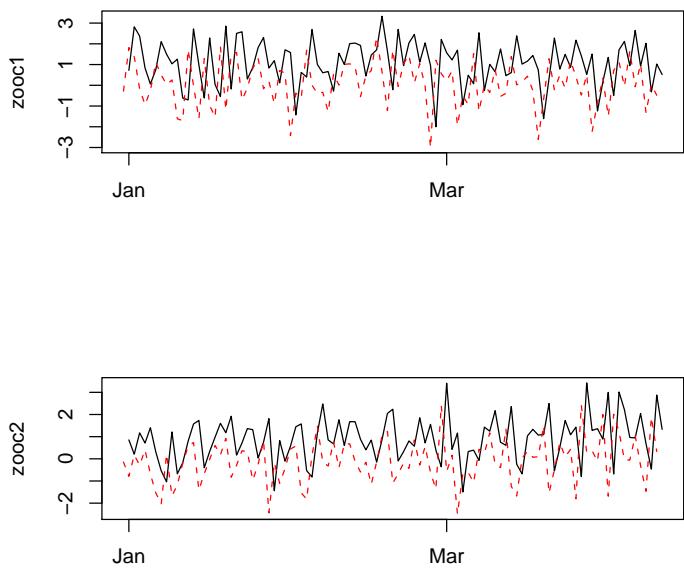


```

> z <- zoo(matrix(rnorm(200), 100, 2), as.Date("1990-01-01") +
  0:99 * 7)
> seriesNames(z) <- c("zooWc1", "zooWc2")
> TSreplace(z, con, Table = "W")

[1] TRUE

> tfplot(z + 1, TSget(c("zooWc1", "zooWc2"), con), col = c("black",
  "red"), lty = c("dashed", "solid"))

```

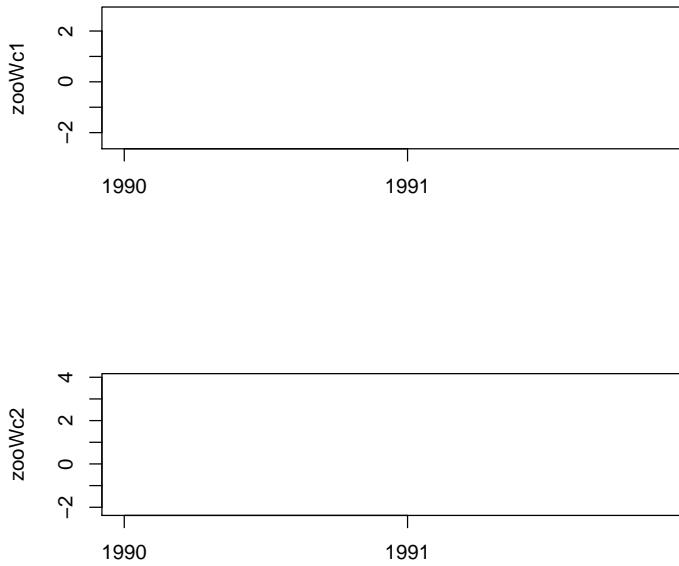

3 Examples Using Web Data

This section illustrates fetching data from a web server and loading it into the database. This would be a very slow way to load a database, but provides examples of different kinds of time series data. The fetching is done with *TShistQuote* which provides a wrapper for *get.hist.quote* from package *tseries* to give syntax consistent with the *TSdbi*.

Fetching data may fail due to lack of an Interenet connection or delays.

The connection *con* established above to the database will be used to save data but, to make the use of the two connections more obvious, neither will be set as the default:

```
> options(TSconnection = NULL)
```

Now connect to the web server and fetch data:

```
> require("TShistQuote")
> Yahoo <- TSconnect("histQuote", dbname = "yahoo")
> x <- TSget("^gspc", quote = "Close", con = Yahoo)
> plot(x)
> tfplot(x)
> TSrefperiod(x)
```


```
[1] "Close"
> TSdescription(x)
[1] "^gspc Close from yahoo"
> TSdoc(x)
[1] "^gspc Close from yahoo retrieved 2008-11-02 21:20:16"
```

Then write the data to the local server, specifying table B for business day data (using TSreplace in case the series is already there from running this example previously):

```
> TSreplace(x, serIDs = "gspc", Table = "B", con = con)
[1] TRUE
```

and check the saved version:

```
> TSrefperiod(TSget(serIDs = "gspc", con = con))
[1] "daily"
> TSdescription("gspc", con = con)
[1] "NA"
> TSdoc("gspc", con = con)
[1] "NA"
> tfplot(TSget(serIDs = "gspc", con = con))
```

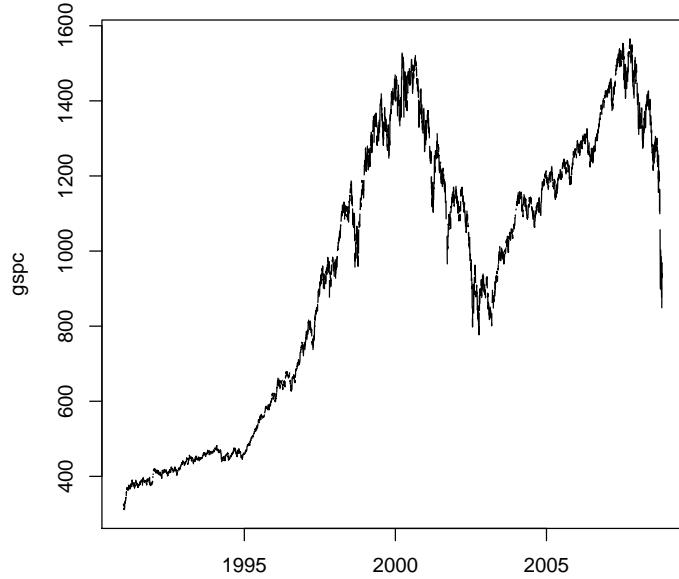

```

> x <- TSget("ibm", quote = c("Close", "Vol"), con = Yahoo)
> TSreplace(x, serIDs = c("ibm.Cl", "ibm.Vol"), con = con, Table = "B",
  TSdescription. = c("IBM Close", "IBM Volume"), TSdoc. = paste(c("IBM Close retrieved
  "IBM Volume retrieved on "), Sys.Date()))
[1] TRUE


> z <- TSget(serIDs = c("ibm.Cl", "ibm.Vol"), TSdescription = TRUE,
  TSdoc = TRUE, con = con)
> TSdescription(z)
[1] "IBM Close from testvigFame.db retrieved 2008-11-02 21:20:25"
[2] "IBM Volume from testvigFame.db retrieved 2008-11-02 21:20:25"

> TSdoc(z)
[1] "IBM Close retrieved on 2008-11-02"
[2] "IBM Volume retrieved on 2008-11-02"


> tfplot(z, xlab = TSdoc(z), Title = TSdescription(z))
> tfplot(z, Title = "IBM", start = "2007-01-01")

```

**IBM Close from testvigFame.db retrieved 2008-11-02 21:20:4
IBM Volume from testvigFame.db retrieved 2008-11-02 21:20**

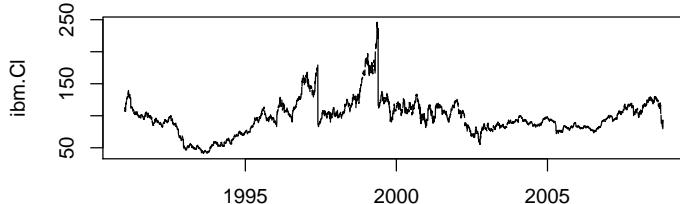

IBM Close retrieved on 2008-11-02

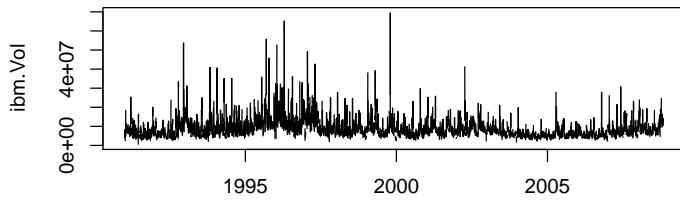

IBM Volume retrieved on 2008-11-02


```
> Oanda <- TSconnect("histQuote", dbname = "oanda")
> x <- TSget("EUR/USD", start = "2004-01-01", con = Oanda)
> TSreplace(x, serIDs = "EURUSD", con = con)
```

```
[1] TRUE
```

and check the saved version:

```
> z <- TSget(serIDs = "EURUSD", TSdoc = TRUE, TSdescription = TRUE,
  con = con)
> tfplot(z, Title = TSdoc(z), ylab = TSdescription(z))
> tfplot(z, Title = "EUR/USD", start = "2007-01-01")
> tfplot(z, Title = "EUR/USD", start = "2007-03-01")
> tfplot(z, Title = "EUR/USD", start = Sys.Date() - 14, end = Sys.Date(),
  xlab = format(Sys.Date(), "%Y"))
```

NA

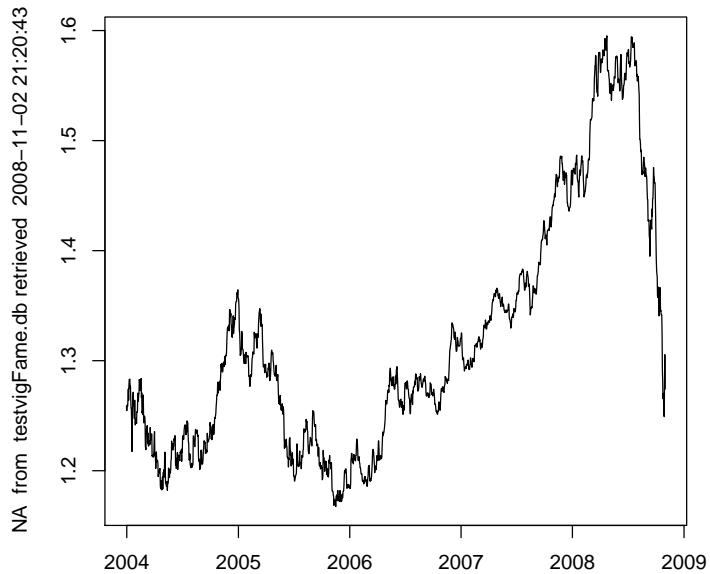

```
> dbDisconnect(con)
> dbDisconnect(Yahoo)
> dbDisconnect(Quanda)
```

Finally, `dbDisconnect` does nothing in `TSfame`, but is provided for compatibility with other packages.

```
> dbDisconnect(con)
> options(TSconnection = NULL)
```