

Running simulations using `retrocombinator`

Anindya Sharma

2021-11-11

Running Simulations

The `retrocombinator` package provides a method for simulating the molecular evolutionary process of retrotransposon recombination over large scales of time.

To use it, load the library first.

```
library(retrocombinator)
```

To run a simulation, call the `simulateEvolution()` function. This runs a simulation with default parameters, and returns a path to a simulation output file.

```
simulateEvolution()  
#> [1] "simulationOutput.out"
```

To overwrite any parameters, first create objects to represent the parameters you wish to overwrite, such as in the example given below. Refer to the section below for what the various parameters are. Whenever a parameter is not specified explicitly, the default will be used.

```
# --- NOT RUN (this is an alternative) ---  
recombParams <- RecombParams(recombMean = 1.0)  
activityParams <- ActivityParams(lengthCriticalRegion = 20,  
                                probInactiveWhenMutated = 0.1)  
simulateEvolution(recombParams = recombParams, activityParams = activityParams)  
# -----
```

Using custom sequences

By default, `simulateEvolution()` runs a simulation on randomly generated sequences. To use a custom sequence, specify it in `SequenceParams` (more details in the section below, that describes all possible parameters to the simulation).

```
# --- NOT RUN (this is an alternative) ---  
  
# Obtain your sequence in your favourite way  
library(Biostrings)  
fastaInput <- readDNASTringSet('path/to/your/FASTA/file')  
yourSequence <- toString(fastaInput$yourSequence)  
  
# Override the sequence parameters and pass it to the simulation  
sequenceParams <- SequenceParams(initialSequence = yourSequence)  
simulateEvolution(sequenceParams = sequenceParams)  
# -----
```

Simulation parameters and their defaults

- **SequenceParams** represents what set of retrotransposons the simulation starts off with. It is constructed by either specifying an explicit initial sequence, or a sequence length (in which case the sequence is created randomly by sampling from a uniform A/G/C/T distribution.) Besides that, the number of initial copies of the initial retrotransposon needs to be specified (the simulation creates multiple copies of the initial sequence to begin with):
 - **sequenceLength** : **numeric** Sequence length (number of nucleotides) of the initial retrotransposon (constructed randomly); ignored if **initialSequence** is not **NULL** (**default = 5000**)
 - **initialSequence** : **character** The initial retrotransposon to consider; can be **NULL** if **sequenceLength** is specified instead (**default = NULL**)
 - **numInitialCopies** : **numeric** Number of copies of initial retrotransposon (**default = 20**)
- **ActivityParams** represents the parameters used during a simulation in which we keep track of a retrotransposon's *active* status. A retrotransposon that is active is capable of transposition or bursting, but potentially loses its active status if a point mutation affects a critical part of the sequence.
 - **lengthCriticalRegion**: **numeric** Sequence length (number of nucleotides) of the critical region of a retrotransposon (**default = 10**)
 - **probInactiveWhenMutated** : **numeric** The probability that a single point mutation to the critical region causes a sequence to become inactive (**default = 0.01**)
- **MutationParams** represents how what nucleotide substitution model will be used to modify the sequences during the simulation. It is constructed from one of the following **character** literals to the argument model:
 - "JC69" Jules and Cantor - 1969
 - "K80" Kimura - 1980 (**default**)
 - "F81" Felsenstein - 1981
 - "HKY85" Hasegawa, Kishino and Yano - 1985
 - "TN93" Timura and Nei - 1993
 - "GTR" General Time Reversible Model, Tavaré - 1986
- **BurstParams** represents how an active retrotransposon will burst during transposition. It comprises of the following:
 - **burstProbability** : **numeric** The probability that an active retrotransposon will increase in copy number during a time jump of one timestep (**default = 0.1**)
 - **burstMean** : **numeric** The Poisson mean for the distribution that specifies how many new sequences an active sequence will create during bursting (**default = 1**)
 - **maxTotalCopies** : **numeric** The largest population size of sequences to keep track of (if this is exceeded, sequences are randomly discarded to simulate death) (**default = 50**)
- **RecombParams** represents how two transposons recombine during transposition
 - **recombMean** : **numeric** The expected number of template switches during recombination between two sequences (chosen from a Poisson distribution with this as its mean) (**default = 1.5**)
 - **recombSimilarity** : **numeric** How similar does an active sequence have to be with another sequence for them to be allowed to recombine during transposition? (**default = 0.80**)
- **SelectionParams** represents what sequences we are interested in storing during the simulation. It comprises of the following:
 - **selectionThreshold** : **numeric** What sequence similarity to the original sequence do we wish to maintain? Sequences that diverge beyond this similarity level are dropped over the course of simulation (**default = 0.3**)
- **FamilyParams** represents how we keep track of families during the simulation. It comprises of the following:
 - **familyCoherence** : **numeric** What sequence similarity do two sequences have to be to each other for them to be considered to be of the same family? (**default = 0.70**)
 - **maxFamilyRepresentatives** : **numeric** How many family representatives to keep track of during the simulation? (**default = 20**)
- **SimulationParams** represents how long the simulation will run for, and at what timescale. It comprises of the following:

- `numSteps` : `numeric` The number of steps in our simulation - the simulation starts at a step count of 0, and runs until the step count is `numSteps` (**default = 20**)
- `timePerStep` : `numeric` How much real time does one step in our simulation measure, in millions of years (**default = 1**)
- `OutputParams` represents how and where the output of the simulation will be saved. It comprises of the following:
 - `outputFilename` : `character` Where should the simulation be saved? (**default = 'simulationOutput.out'**)
 - `outputNumInitialDistance` : `numeric` How many times during the simulation should we output the distance of sequences to the initial sequence? (**default = 10**)
 - `outputNumPairwiseDistance` : `numeric` How many times during the simulation should we output pairwise distances between all pairs of sequences? (**default = 10**)
 - `outputNumFamilyLabels` : `numeric` How many times during the simulation should we output the family numbers of each sequence? (**default = 10**)
 - `outputNumFamilyMatrix` : `numeric` How many times during the simulation should we output the pairwise distances between family representatives? (**default = 10**)
 - `outputMinSimilarity` : `numeric` What is the minimum similarity between two sequences we should report on? (**default = 0.5**)
- `SeedParams` represents how to select the seed for randomisation for the simulation. It comprises of the following:
 - `toSeed` : `logical` Should this simulation be run with a specified seed to begin with? If `FALSE`, a seed based on system time is used (**default = TRUE**)
 - `seedForRNG` : `numeric` If `toSeed` is `TRUE`, what should the initial seed for the random number generator be? (**default = 0**)

Output

The simulation creates a custom output file and returns a path to it (specified by `outputFilename` in `OutputParams`, which by default is `'simulationOutput.out'`). This file can be parsed by `parseSimulationOutput()`.

```
data <- parseSimulationOutput('simulationOutput.out')
```

```
# --- NOT RUN (this is an alternative) ---
```

```
# Alternatively, using the pipe operator
```

```
library(magrittr) # For %>%
data <- simulateEvolution() %>%
  parseSimulationOutput()
```

```
# -----
```

This contains

- a list of the parameters used to run the simulation
- a data frame of the sequences over time and their similarity to the initial sequence
- a data frame of the pairwise similarity of sequences over time
- a data frame of the family representatives for the retrotransposons over time
- a data frame of the pairwise similarity of the family representatives for the retrotransposons over time

For pairwise similarity, pairs are not duplicated, and only distinct pairs are given. That is, for any timestep and sequences with `sequenceId` `a` and `b` present at that time, a row is present in the `pairwise` dataframe if and only if $a < b$.

```
print(names(data$params))
#> [1] "SequenceParams_sequenceLength"
#> [2] "SequenceParams_initialSequence"
```

```

#> [3] "SequenceParams_numInitialCopies"
#> [4] "ActivityParams_lengthCriticalRegion"
#> [5] "ActivityParams_probInactiveWhenMutated"
#> [6] "MutationParams_model"
#> [7] "BurstParams_burstProbability"
#> [8] "BurstParams_burstMean"
#> [9] "BurstParams_maxTotalCopies"
#> [10] "RecombParams_recombMean"
#> [11] "RecombParams_recombSimilarity"
#> [12] "SelectionParams_selectionThreshold"
#> [13] "FamilyParams_familyCoherence"
#> [14] "FamilyParams_maxFamilyRepresentatives"
#> [15] "SimulationParams_numSteps"
#> [16] "SimulationParams_timePerStep"
#> [17] "OutputParams_outputFileName"
#> [18] "OutputParams_outputNumInitialDistance"
#> [19] "OutputParams_outputNumPairwiseDistance"
#> [20] "OutputParams_outputNumFamilyLabels"
#> [21] "OutputParams_outputNumFamilyMatrix"
#> [22] "OutputParams_outputMinPairwiseSimilarity"
#> [23] "SeedParams_toSeed"
#> [24] "SeedParams_seed"
# Prints out all the parameters the simulation was run with

print(colnames(data$sequences))
#> [1] "step" "realTime" "sequenceId"
#> [4] "parentMain" "parentOther" "distanceToInitial"
#> [7] "isActive"
# step - timestep in the simulation
# realTime - time since the start of the simulation (in millions of years)
# sequenceId - the unique ID of the sequence (to track it over time); initial
# sequence has sequenceId 0 to (numInitialCopies-1)
# parentMain - the unique ID of the sequence this burst from;
# (-1 if nothing)
# parentOther - the unique ID of the sequence its parent recombined with;
# (-1 if nothing)
# distanceToInitial - the distance to the initial sequence
# isActive - whether or not the sequence is capable of transposition

print(colnames(data$pairwise))
#> [1] "step" "realTime" "sequenceId1" "sequenceId2"
#> [5] "distancePairwise"
# step - timestep in the simulation
# realTime - time since the start of the simulation (in millions of years)
# sequenceId1 - an ID of a sequence present at the time
# sequenceId2 - an ID of a different sequence present at the time; not all pairs
# are given - that is, for sequences a and b, either (a, b) or (b, a)
# is present as a row but not both
# distancePairwise - the distance between the two sequences

print(colnames(data$familyRepresentatives))
#> [1] "step" "realTime" "familyId" "creationTime" "sequenceId"
# step - timestep in the simulation

```

```

# realTime - time since the start of the simulation (in millions of years)
# familyId - the unique ID of the family representative (to track it over time)
# creationTime - time this family representative was created (in millions of years)
# sequenceId - a sequence belonging to that family (sequences belonging to a
#               family are listed as separate rows, and all sequences belonging
#               to that family are listed)

print(colnames(data$familyPairwise))
#> [1] "step"          "realTime"      "familyId1"     "familyId2"
#> [5] "distancePairwise"
# step - timestep in the simulation
# realTime - time since the start of the simulation (in millions of years)
# familyId1 - an ID of a family representative present at the time
# familyId2 - an ID of a different family representative present at the time;
#             not all pairs are given - that is, for sequences a and b, either (a, b) or (b,
#             a) is present as a row but not both
# distancePairwise - the distance between the two family representatives

```


Analysis

Summary statistics can be obtained from the data as follows.

```
summariseEvolution(data) # TODO
```

The data can be visualised using the plotEvolution function

```
plotEvolution(data, "initial") # Distance to initial sequence
```

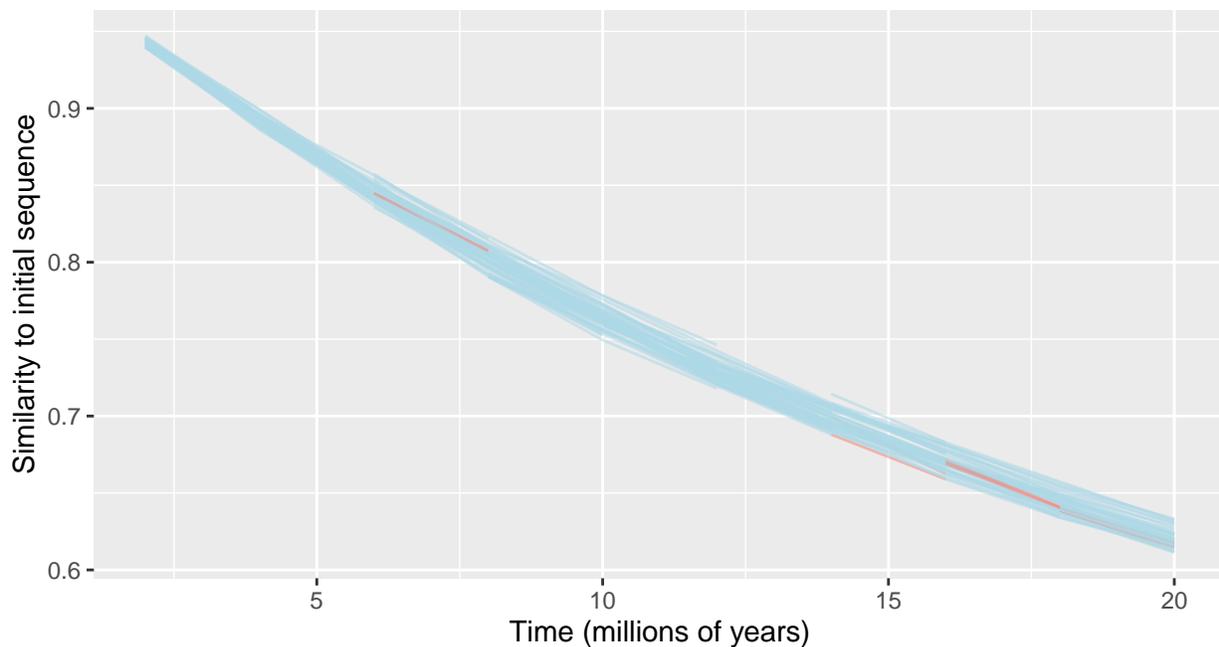


Capable of transposition events (active status)

— FALSE
— TRUE


```
plotEvolution(data, "pairwise")
```

```
# Pairwise distances between sequences
```

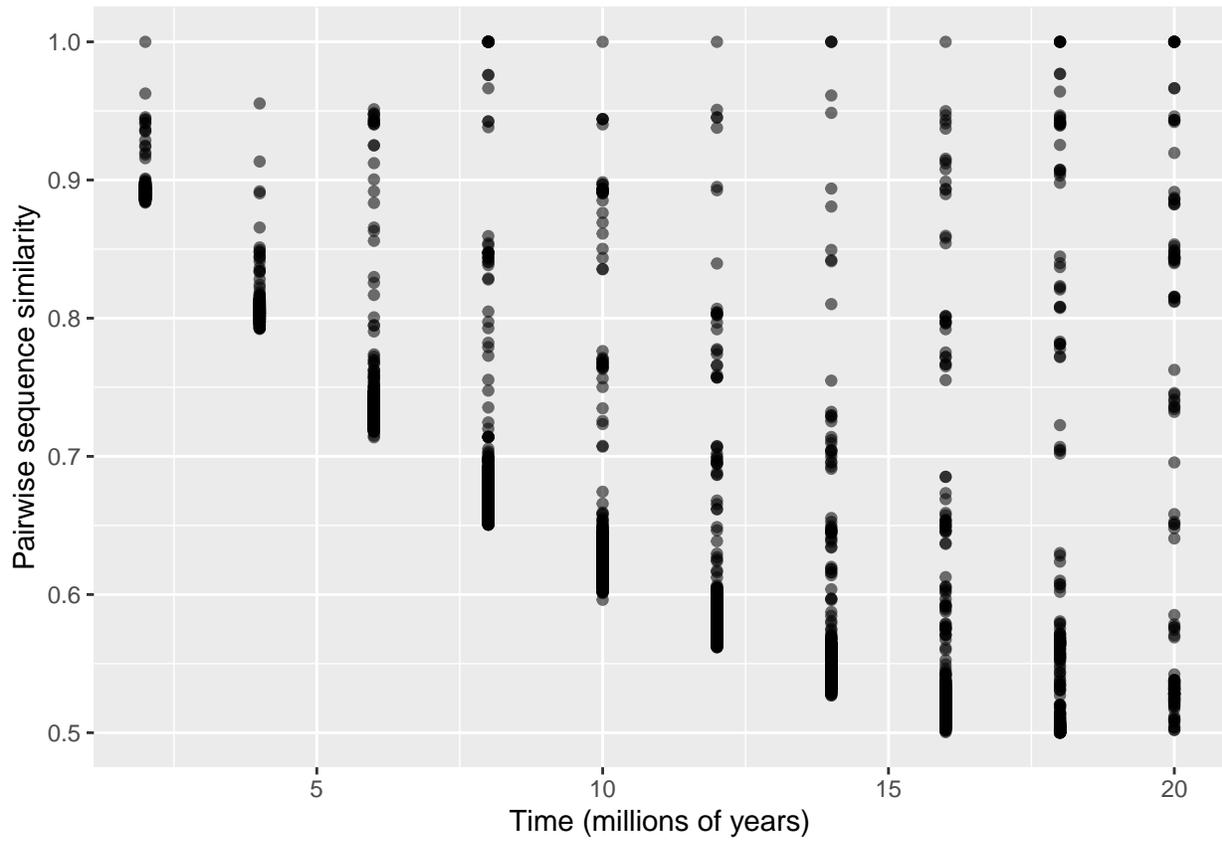

```
plotEvolution(data, "families")
```

```
# Family sizes
```

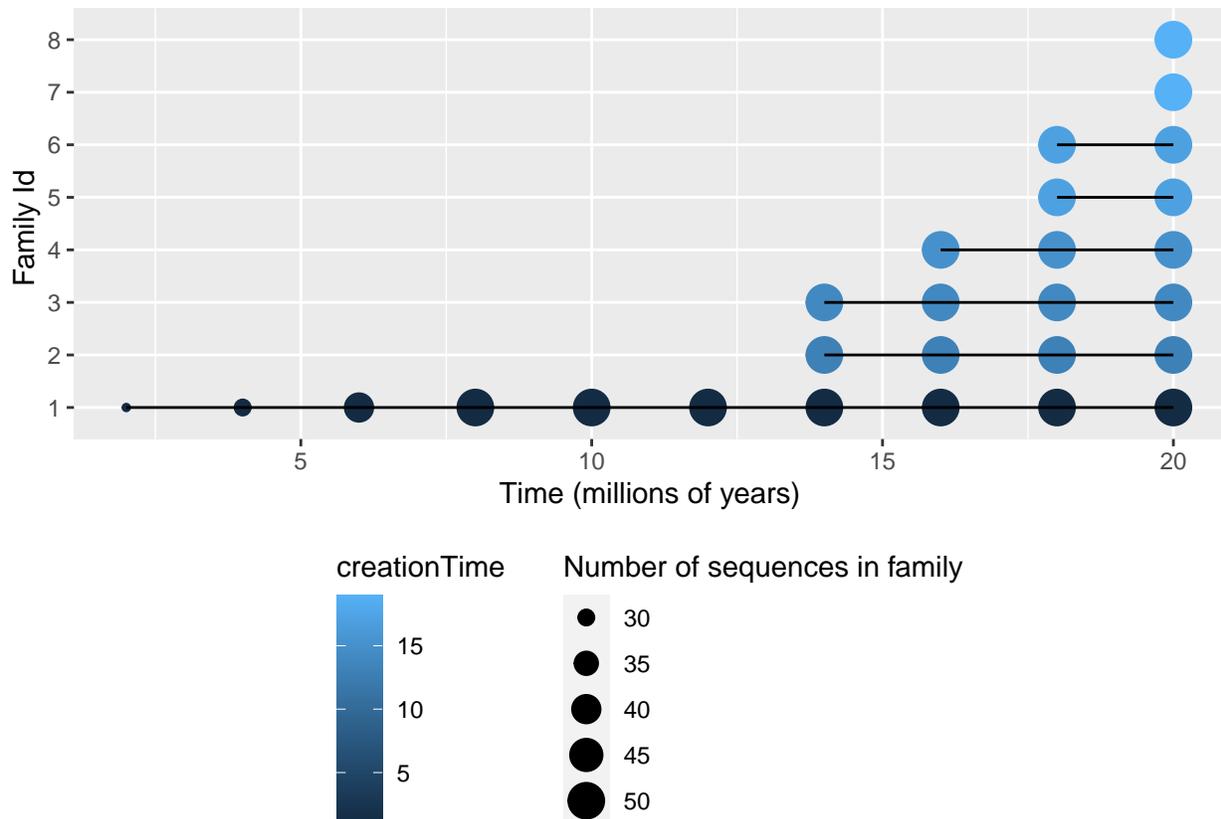

Example with all parameters

```

sequenceParams <- SequenceParams(initialSequence = "TCAGTCAGTCAGTCAGTGTG",
                                  numInitialCopies = 10)
activityParams <- ActivityParams(lengthCriticalRegion = 2,
                                 probInactiveWhenMutated = 0.1)
mutationParams <- MutationParams(model = "F81")
burstParams <- BurstParams(burstProbability = 0.2,
                           burstMean = 2,
                           maxTotalCopies = 40)
recombParams <- RecombParams(recombMean = 2.0,
                             recombSimilarity = 0.85)
selectionParams <- SelectionParams(selectionThreshold = 0.25)
familyParams <- FamilyParams(familyCoherence = 0.65,
                             maxFamilyRepresentatives = 15)
simulationParams <- SimulationParams(numSteps = 35,
                                     timePerStep = 1.5)
outputParams <- OutputParams(outputFilename = 'simulationExampleParameters.out',
                             outputNumInitialDistance = 5,
                             outputNumPairwiseDistance = 5,
                             outputNumFamilyLabels = 5,
                             outputNumFamilyMatrix = 5,
                             outputMinSimilarity = 0.1)
seedParams <- SeedParams(toSeed = TRUE, seedForRNG = 1)
simulateEvolution(sequenceParams = sequenceParams,
                  activityParams = activityParams,

```

```
mutationParams = mutationParams,  
burstParams = burstParams,  
recombParams = recombParams,  
selectionParams = selectionParams,  
familyParams = familyParams,  
simulationParams = simulationParams,  
outputParams = outputParams)  
#> [1] "simulationExampleParameters.out"
```