

# btable


Enrico Schumann  
es@enricoschumann.net

## 1 btable

btable creates a simple barplot in a L<sup>A</sup>T<sub>E</sub>X tabular. As an example, add this to a Sweave file:

```
\begin{tabular}{ll}
<<echo=false, results=tex>>=
x <- 1:5
cat(btable(x, before = paste(x, "&"), after= "\\\\\n"))
@
\end{tabular}
```

The output should be:

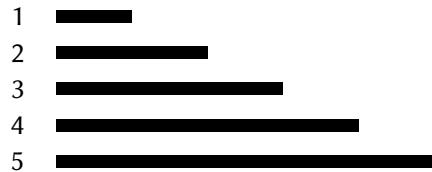

```
> toLatex(sessionInfo())
```

- R version 3.3.3 (2017-03-06), x86\_64-w64-mingw32
- Locale: LC\_COLLATE=C, LC\_CTYPE=German\_Switzerland.1252,  
LC\_MONETARY=German\_Switzerland.1252, LC\_NUMERIC=C,  
LC\_TIME=German\_Switzerland.1252
- Base packages: base, datasets, grDevices, graphics, methods, stats, utils
- Other packages: textutils 0.1-9
- Loaded via a namespace (and not attached): tools 3.3.3